


Model : CRESBOX

Semi-automatic 4 point probe sheet resistance/resistivity measurement system

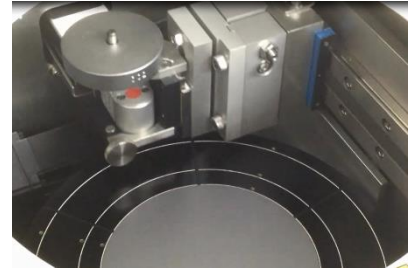

High performance & Small foot print

Programmable & arbitrary pattern for round & square shape

Features

- Multi-points measurement and Mapping display
 - 2-D map / 3-D map graphic display
 - Multipoint pattern measurement is programmed (maximum 1225 points) and random pattern is programmable by operator.
- Film thickness conversion function from sheet resistance
- Measurement data base link with Excel via CSV format file
- Software language can be switched in English / Japanese by operator
- Complies with the following ASTM & JIS
 - <JIS> JIS H 0602-1995, JIS K 7194-1994
 - <ASTM> ASTM F 84-99(SEMI MF84),
ASTM F 374-00a, ASTM F 390-11,
ASTM F 1529-97

Applications

- Semiconductor materials, Solar-cell materials (Silicon, Polysilicon, SiC etc)
- New materials, functional materials (Carbon nanotube, DLC, graphene, Ag nanowire etc)
- Conductive thin film (Metal, ITO etc)
- Diffused sample (or layer)
- Silicon-related epitaxial materials, Ion-implantation sample
- Others (*Please contact us for details)

Sample Sizes

Size : ~ 8 inch, ~ 156x156mm

Thickness : ~ 2mm

Measurement Range


Test Item	Measurement Range
V/I Ratio	1m ~ 3M ohm
Sheet resistance	5m ~ 10M ohm/sq
Resistivity(Slice:100~2000μm)	1m ~ 300k ohm.cm

A global leading company for resistivity measurement system.




Software Function


- Measurement result can be displayed by 2-D / 3-D map graphic.
- Mapping graphic can be saved by JPEG file.
- SPC Chart display function.

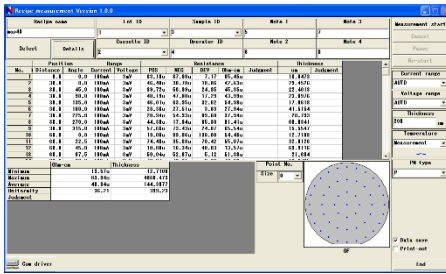


Software : Main

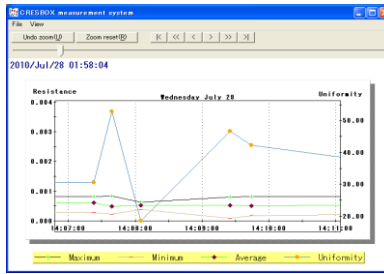

SPC Chart display

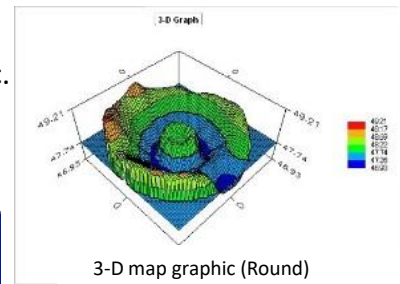

3-D map graphic (Round)



3-D map graphic (Square)

Measurement Accuracy / Repeatability

Measurement Accuracy

$$\%BIAS < \pm 1\%$$

$$\%BIAS = \frac{\bar{X} - NIST\text{guaranteedvalue}}{NIST\text{guaranteedvalue}} \times 100[\%]$$

\bar{X} ----- Average of same point x 10times measurement(23°C)

Measurement Repeatability

$$CV \leq 0.7\%$$

$$CV = \frac{\sigma}{\bar{X}} \times 100[\%]$$

σ ----- Standard deviation of same point
x 10times measurement(23°C)
 \bar{X} ----- Average of same point x 10times measurement(23°C)

Throughput (Tact time)

Points	Tact time	Time / Point
1	16s (±3s)	16s
5(+)	25s (±3s)	5s
5(-)	25s (±3s)	5s
9(+)	34s (±3s)	3.8s
17	45s (±3s)	2.7s
49	90s (±3s)	1.9s

*Throughput will change by setting conditions, resistance value and the sample surface state.

☆ Please visit our website for [the movie of this system.](#)

*Please contact us for more details.

*The customers are always welcome to do Demo measurement.

*Specification subject to change without notice.